


## 72–214 Removal and installation of front door reveal molding

---

### Removal

---

- 1 Remove door liner (72–100).
- 2 Remove inner sealing rail (72–160).
- 3 Remove outer sealing rail (72–170).
- 4 Pull flexible window running rail off of window frame in area of reveal molding.
- 5 Pull rubber frame off of door seam in area of reveal molding.
- 6 Take reveal molding off of window frame.

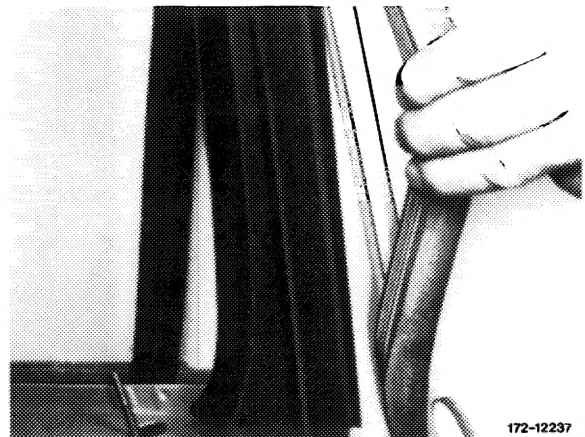

172–12237

### Installation

---

- 7 Install in reverse sequence.